



Model Name MW705 Projector

Unique selling point

- * 4000ANSI Lumen High Brightness
- * 13000:1 High Contrast Ratio
- * New keypad for Easy Operation
- * MHL Mirror the Screen of Smart Device
- * Wireless Presentation via Your Smart Device by OCast^(optional)

Trade Mark



Projection System	DLP	
Native Resolution	WXGA (1280x800)	
Brightness	4000 ANSI Lumen	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.56~2.68, f=22.04~24.14mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.55~1.7(TBD@2m)	
Image Size (Diagonal)	60" ~ 300"	
Zoom Ratio	1.1x	
Lamp Type	240W	
Lamp(Normal/Economic/SmartEco/LampSave)*	2500/4000/6000/7500(80%~30%) hours	
Keystone Adjustment	2D, Vertical & Horizontal ± 40 degrees; Auto vertical keystone ± 30 degrees	
Projection Offset	Vertical: 100% $\pm 5\%$	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking	
Horizontal Frequency	15K-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM 3D Compatibility Frame Sequential: Up to 60Hz 720p (Please refer to User Manual for detailed support timing.) Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p	
Interface	Computer in (D-sub 15pin) x1 (integrate with component) HDMI x2 (HDMI with MHL2.0 x1, HDMI x 1) MHL x 1 (HDMI with MHL2.0) Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio in (L/R) x1 Audio out (Mini Jack) x 1 Speaker 2W x 1 USB (Type A) x 1 (1.5A power supply) RS232 (DB-9pin) x 1 IR Receiver x2 (Front+Top)	
Dimensions	Dimensions(W x H x D) TBD 300x 88 x 240 mm (include feet) TBD mm (exclude) Weight TBD lbs (TBD 2.8 Kg)	
Power	Power Supply AC100 to 240V, TBD A, 50 to 60 Hz Power Consumption TBDW(Normal), TBD W(Eco), Standby <0.5W Power Management Function Automatic power off after 20 minutes without a display source	
Audible Noise	33/29 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	**Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2	
Accessories	Standard Carry bag Remote Control w Battery User Manual CD Lens Cover	Optional Power Cord (by region) VGA cable QSG Warranty Card (by region) Spare Lamp Kit Ceiling mount kit Carry bag 3D Glasses Video Streaming Dongle - QCast

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


** Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.

MW705 Projector

Distance Chart

Ceiling mount Chart

Dimension

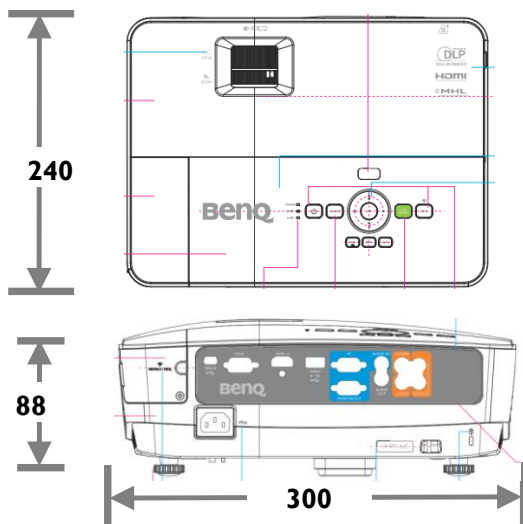

Unit: mm

